



RINGLAHENDUSED

VERTICAL-LIFT UNDERGROUND MONOBLOCK

# Under.Bin

High capacity below ground. A clear public space above.

Under.Bin places the collection volume underground and leaves only a compact, accessible top bin at street level. It is designed for prestigious and intensively used locations where visual impact, safety and accessibility matter.

**3,000 / 4,500 L**

CAPACITIES

**900 mm**

OPENING HEIGHT

**440 mm**

DEPOSIT OPENING

**UNE-EN 13071**

PRODUCT STANDARD


## SUITABLE USE

- Historic centres, squares and promenades
- High-footfall public spaces
- Locations where waste and visual volume should remain below ground



# Under.Bin dimensions and specifications

Source: Formato Verde product material

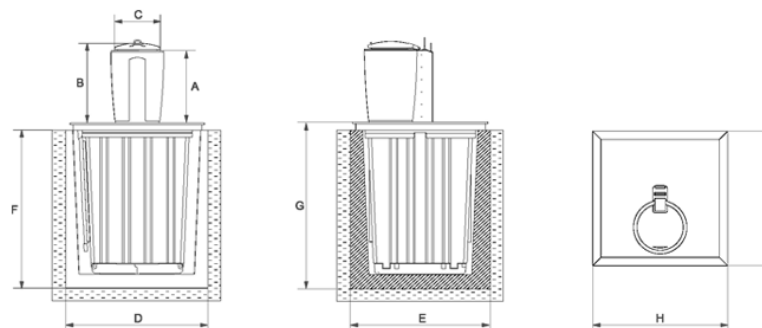

| Parameter                        | 3,000 L                    | 4,500 L                    |
|----------------------------------|----------------------------|----------------------------|
| <b>Total length</b>              | 1,665 mm                   | 1,665 mm                   |
| <b>Total width</b>               | 1,665 mm                   | 1,665 mm                   |
| <b>Total height</b>              | 2,150 mm                   | 2,835 mm                   |
| <b>Height including pavement</b> | 2,180 mm                   | 2,865 mm                   |
| <b>Empty weight</b>              | 275 kg                     | 425 kg                     |
| <b>Maximum permissible mass</b>  | 1,475 kg                   | 2,225 kg                   |
| <b>Top-bin opening height</b>    | 900 mm                     | 900 mm                     |
| <b>Deposit opening diameter</b>  | 440 mm                     | 440 mm                     |
| <b>Standards</b>                 | UNE-EN 13071-1/-2 · EN 206 | UNE-EN 13071-1/-2 · EN 206 |